


- ▶ 90° × 90°
- ▶ 15"
- ▶ JBL 2408-2
- ▶ 15 mm DuraFlex™
- ▶ M10 35 mm
- ▶
- ▶
- ▶ JBL COMMERCIAL

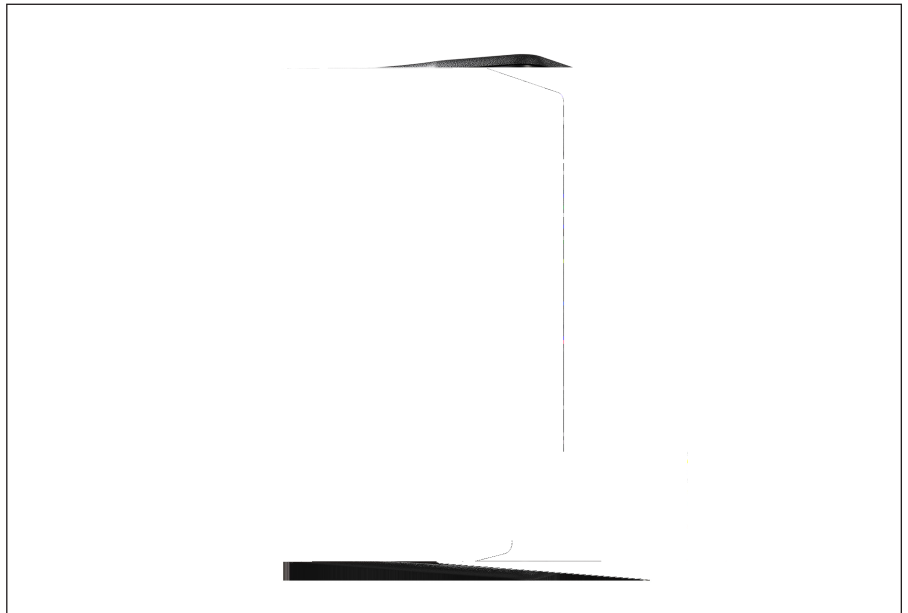

CV3015/99 JBL  
15"

CV3015/99 15"  
JBL 2408-2

90° × 90°

CV3015/99

CV3015/99 M10 35 mm  
CV3015/99

Neutrik Speakon®  
CV3015/99



NL4  
DuraFlex™

CV3015/99

CV3015/99

-10 dB	<sup>1</sup>	45 Hz – 20 kHz				
±3dB	<sup>1</sup>	75 Hz – 20 kHz				
		90°×90°				
IEC	<sup>2</sup>	<sup>3</sup>	400 W / 800 W / 1600 W	/	/	
		1m	<sup>2</sup>	125 dB	131 dB	
2.83V@1m	<sup>1</sup>			99 dB		
				8 Ω		
			1 × 15"		3"	
			1 × 2408-2		1.5"	
			20°		15mm	
			13 M10	3@	3@	2@ 3@ ×
						35mm OmniMount
						DuraFlex™
						1.5 mm
						NL4 Neutrik Speakon®
		H × W × D		680 mm × 414.4 mm × 445 mm		
				26.8 in × 16.3 in × 17.5 in		
				23.15 kg	51.0 lbs	

<sup>1</sup> 4π  
<sup>2</sup>  
<sup>3</sup> IEC 6 dB 2

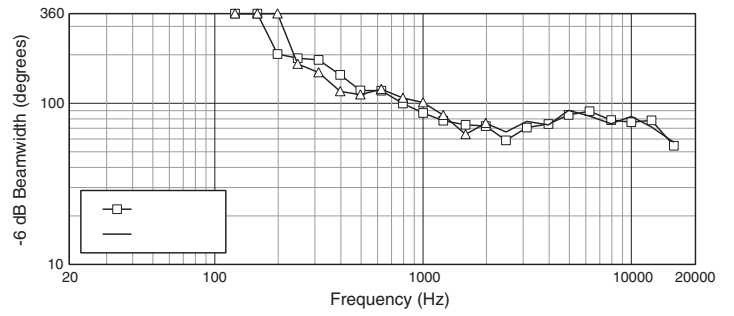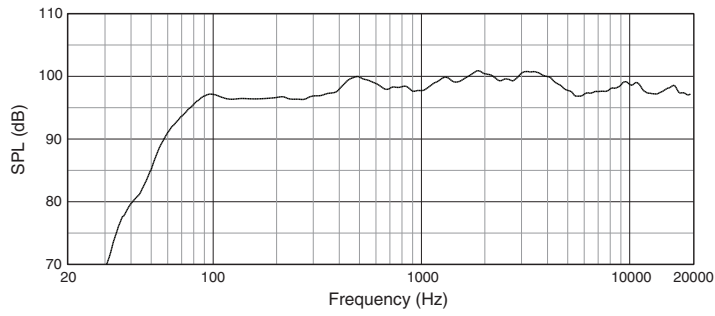

mm inch